


ANTIDARK



Downlight ANTIDARK Datasheet

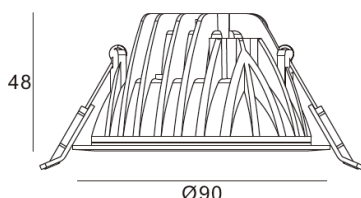

9W
2700K



LED downlight. 9W. 220-240V 50/60Hz. 750lm. 2700K. BA36°. CRI90+. 50.000h. IP44. Cut-out size: 78-83mm. Looping box. Directly in insulation. Aluminium base. Dimmable with trailing edge. 5 year warranty.

LED indbygningsspot. 9W. 220-240V 50/60Hz. 750lm. 2700K. BA36°. CRI90+. 50.000t. IP44. Udskæring: Ø78-83mm. Sløjfeboks. Direkte i isolering. Aluminium base. Dæmpbar med bagkant. 5 års garanti.

2-260-50-1

White/ hvid

EAN 5706872020805

2-260-50-2

Black/ sort

EAN 5706872021185

9W
3000K



LED downlight. 9W. 220-240V 50/60Hz. 800lm. 3000K. BA36°. CRI90+. 50.000h. IP44. Cut-out size: 78-83mm. Looping box. Directly in insulation. Aluminium base. Dimmable with trailing edge. 5 year warranty.

LED indbygningsspot. 9W. 220-240V 50/60Hz. 800lm. 3000K. BA36°. CRI90+. 50.000t. IP44. Udskæring: Ø78-83mm. Sløjfeboks. Direkte i isolering. Aluminium base. Dæmpbar med bagkant. 5 års garanti.

2-260-51-1

White/ hvid

EAN 5706872020812

2-260-51-2

Black/ sort

EAN 5706872030767